

"LEADER IN ANIMAL CARE PRODUCTS FOR OVER 60 YEARS"



SSCI

SUBURBAN SURGICAL Co., Inc.

275 Twelfth Street, Wheeling, IL 60090

All intellectual material, including the text, graphics and other components of this catalog are Copyrighted by SSCI.
Any use or duplication of these intellectual materials, without written consent by SSCI, is strictly forbidden.

CUBICLES

STAINLESS STEEL ISOLATION CUBICLES AND VERTICAL SLIDING ISOLATION CUBICLE DOORS



**The "Total" Stainless Steel
Vertical Sliding Isolation Cubicle Door System**



Stainless Steel Isolation Cubicle



Stainless Steel Isolation Cubicles

This Stainless Steel Isolation Cubicle can be used to quarantine animals for diagnosis, prevention, and treatment of disease; physiological and nutritional stabilization of newly received animals; or to conduct clinical tests that mandate measures to avoid cross-contamination to or from adjoining cages and species.

Each isolation unit can be custom designed to fit in the available space of the laboratory. Stainless steel panels are available as options for side walls and ceilings, if the laboratory does not have side walls for the quarantine/isolation area and prefers to have greater versatility and better utilization of space.


All joints are heli-arc welded for strength and all welds are polished to a satin finish, removing any discoloration.

Isolation Cubicles can utilize the building ventilation system or various types of air handling systems engineered and manufactured by SUBURBAN SURGICAL COMPANY, Inc.

Options:

- Fluorescent lighting with time and dimmer control
- Side panels for right or left
- Top panels for front or sides
- Air filter system

Cubicles

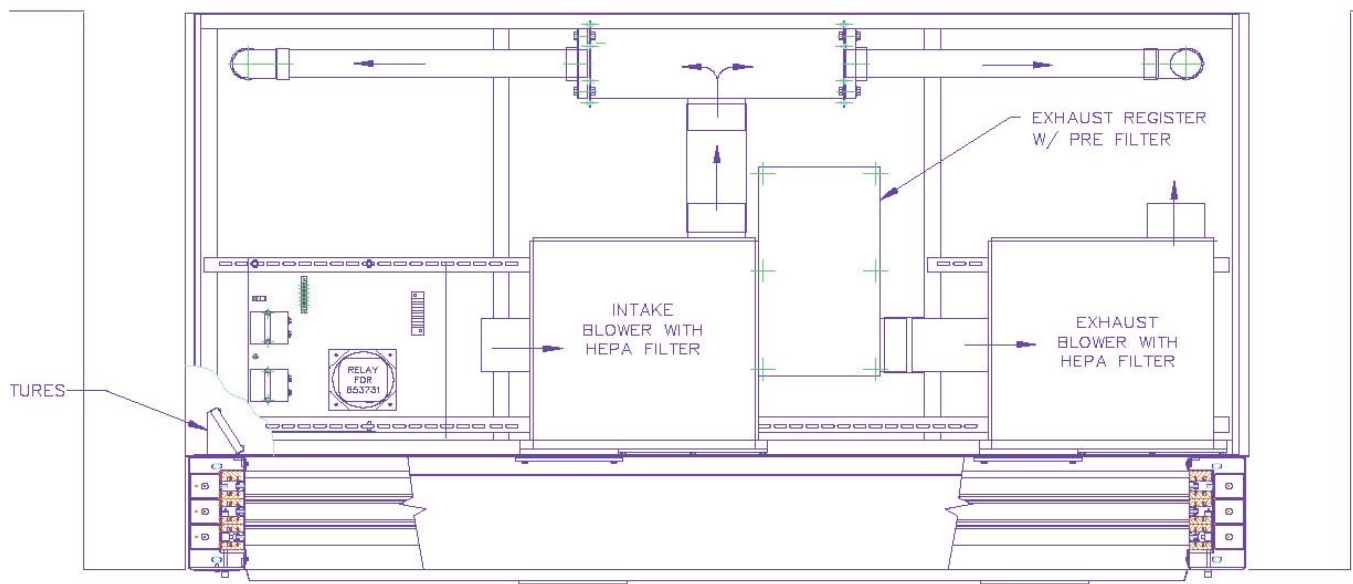

Top View of Cubicle Door with Air Handling System (including air flow layout)

The "TOTAL" Stainless Steel Vertical Sliding Isolation Cubicle Door System

Stainless steel framed door sections with safety glass windows, stainless steel jambs, and a stainless steel header.

All door sections slide vertically in individual floating polyethylene seals and recess simultaneously into the header. These door systems are designed so they can be set up freestanding with stainless steel panels or attached to masonry walls. Each door section is framed with 18 gauge 1-1/2" stainless steel seam welded 5-sided finned tubing mitered at each corner, and continuously heli-arc welded, providing a sealed tubular frame. All welds are polished to a satin finish removing any discoloration. Each door section consists of:

- 1/4" thick safety glass held in place with a continuous air tight rubber glass setting seal (stainless steel die-formed guide runners are welded to the vertical sides of the door section frame)
- 3/32" diameter stranded stainless steel cable and counter-weight attached to both sides
- high density polyethylene horizontal interlocking strip with a rubber insert, forming a seal between all adjoining door sections, the top door section, and the header

The 12 gauge die-formed stainless steel jambs can be attached to the side of a masonry wall, side by side to the front of a masonry wall, or to the front of stainless steel panels. The jambs are fitted with guides that seal and hold the high density polyethylene floating seals in place. Mounted to the top of each jamb's column is a stainless steel shaft with 3" pulleys riding on ball-bearings that support the counter weight's cables. The linen lined phenolic material pulleys have a cable retaining guard. Each counter weight is guided through stainless steel cavities mounted vertically in the jamb's columns.

Two types of headers are available: one for ceiling height door units consisting of an inner and outer panel. The inner panel has a die-formed lip which forms a seal between the top door section and lower edge of the header. The top edge of the inner panel has a die-formed flange and is attached to the room's ceiling. The outer panel completes the recessed housing for the door sections and is also attached to the room's ceiling. Both panels are attached to the jambs. The other is for drop ceiling panels consisting of a stainless steel inner channel and outer panel. The inner channel is a die-formed cross member with a lip, forming a seal between the top door section and header that supports the stainless steel drop ceiling panel. The outer panel is attached to the room's ceiling. Both the inner channel and outer panel are attached to the jambs.



Stainless Steel Isolation Cubicle